Variables and Algo

Astier Guillaume, Lefebvre Loic, Morit Luca

25/09/2026



Contents

The variables **2**
- Variables ? . . . 2
- Specific variables : environment . . . 3
- PATH . . . 3
- PS1 . . . 3
- TERM . . . 4
- HOME . . . 4
- SHELL . . . 4
- List of SHELL linux . . . 4

Protect a variable **5**
- IFS . . . 5
- Change IFS . . . 5
- Protect a variable : Syntax . . . 5
- Variable visibility 1/4 . . . 5
- Variable visibility 2/4 . . . 6
- Variable visibility 3/4 . . . 6
- Variable visibility 4/4 . . . 7
- Protect a variable : Exemples . . . 7

Scripting base **8**
- What is a script . . . 8
- Advantages/Disadvantages . . . 8
- Variable of a script . . . 8
- Example of use . . . 9

Survival_Kit **9**
- Golden rules . . . 9
- Golden rules example 1/2 . . . 9
- Golden rules example 2/2 . . . 10

Algo **10**
- IF Condition . . . 10
- Example of if condition . . . 11
- if/else condition . . . 11
- Example of if/else condition . . . 11
- if/elif condition . . . 12

Example of if/elif condition . . . 12
if/elif/else condition . . . 12
Exemple of condition if/elif/else . . . 13
Tests - File . . . 13
Tests - Strings . . . 14
Tests - Numeric . . . 14
Example of test (1/2) . . . 14
Example de test (2/2) . . . 15
While loop . . . 15
Example of while loop (1/2) . . . 15
Example of while loop (2/2) . . . 16
for loop . . . 16
Example of for loop (1/2) . . . 16
Example of for loop (2/2) . . . 16
Case/Esac . . . 17
Example of Case/Esac . . . 17
BREAK/CONTINUE . . . 18

Process management **18**
nice & renice . . . 18
kill . . . 18
Managing tasks in an interactive session . . . 19
Managing tasks in an interactive session - Foreground mode . . . 19
Managing tasks in an interactive session - Mode background . . . 19
Synthesis . . . 20
Display the processes . . . 20

The variables

Variables ?

A variable has 2 elements :

- the name
- the value –> $name

Specific variables : environment

An environment variable is a dynamic variable used by processes or applications to define information paths or shortcuts. You can visualize all your environment variables with the **env** SHELL command. Usually all the environment variable are in capital case.

- PATH
- PS1
- TERM
- HOME
- SHELL

PATH

PATH is a list of directory. With bash (and not sh) you don't have to write the absolute or relative path of a command. If the command you type exist in one of this directory, bash will call it.

```
1 isen@localhost:~$ echo $PATH
2 /sbin/:/home/isen/bin:/usr/local/bin:/usr/bin:/bin:/usr/local/games:/
     usr/games
3 isen@localhost:~$ id
4 uid=1000(isen) gid=1000(isen) groupes=1000(isen)
5 isen@localhost:~$ which id
6 /usr/bin/id
```

PS1

PS1 stands for "Prompt String One" or "Prompt Statement One"

It is the first prompt string (that you see at a command line).

You can change it easily "live" or in your .bashrc file to be effective in every SHELL terminal

```
1 isen@localhost:~$ echo $PS1
2 echo $PS1
3 \[\e]0;\u@\h: \w\a\]${debian_chroot:+($debian_chroot)}\[\033[01;32m\]\
     u@\h\[\033[00m\]:\[\033[01;34m\]\w\[\033[00m\]\$
4 isen@localhost:~$ PS1="Go for it->"
5 Go for it->echo $PS1
6 Go for it->
```

TERM

TERM variable defines the terminal type.

```
isen@localhost:~$ echo $TERM
xterm-256color
```

HOME

HOME is a Linux bash shell variable. It indicates the home directory of the current user. It also represent the default argument for the cd command. The value of this variable is also used when performing tilde expansion.

The value is set with the /etc/passwd file when the operating system is starting

```
isen@localhost:~$ echo $HOME
/home/isen
isen@localhost:~$ grep isen /etc/passwd
isen:x:1000:1000:A random user:/home/isen:/bin/bash
```

SHELL

The **SHELL** is an environment variable. The full pathname to the shell is in this environment variable.

The value is set with the /etc/passwd file when the operating system is starting

```
isen@localhost:~$ echo $SHELL
/bin/bash
isen@localhost:~$ grep isen /etc/passwd
isen:x:1000:1000:A random user:/home/isen:/bin/bash
```

List of SHELL linux

There is a lot of other shell on linux :

- Shell Bourne (l'antique shell de Steve Bourne) : **/bin/sh**
- **K**orn **SH**ell, the David Korn's shell for UNIX : **/bin/ksh** and **/bin/pdksh** (freeware)
- **C SH**ell : **/bin/csh**
- **Z**orn **SH**ell : **/bin/zsh**
- Bash (**B**ourne **A**gain **SH**ell, the Linux shell) : **/bin/bash**

Protect a variable

IFS

The **IFS** is an acronym for Internal Field Separator or Input Field Separator. The **IFS** is a special shell variable in Bash, ksh, sh, and POSIX. Let us see what **IFS** is and why you need to use it while writing shell scripts under Linux and Unix.

By default the **IFS** is compased by:

- Carriage return
- Tabulation
- Space

Change IFS

IFS can be change before using a command or a function.

You may display the actual value of IFS with the following command

```
1 isen@localhost:$ echo "--$IFS--"
2 --
3 --
```

Warning: many Linux processes use the IFS.

Protect a variable : Syntax

Theres is three essential quotes in SHELL :

- simple quote **'**: the string between these will not be interpreted
- double quote **"**: the string between these will be interpreted (special character like $)
- backquote **`**: the string between these will be a SHELL COMMAND, you can use **$(COMMAND)** to make it more readable

Variable visibility 1/4

All your variables will have a "scope", or a visibility. By default, the variables defined in a SHELL terminal are visible in your SHELL terminal and only in it.

```
isen@localhost:~$ Var=CONTENU
isen@localhost:~$ echo $Var
CONTENU
isen@localhost:~$ bash
isen@localhost:~$ ps
  PID TTY          TIME CMD
 12996 pts/2    00:00:00 bash
 13009 pts/2    00:00:00 bash
 13021 pts/2    00:00:00 ps
isen@localhost:~$ echo $Var

isen@localhost:~$ exit
```

Variable visibility 2/4

You will have to export a variable to make it visible for other CHILD SHELL Terminal or script

```
isen@localhost:~$ Var=CONTENU
isen@localhost:~$ echo $Var
CONTENU
isen@localhost:~$ export Var
isen@localhost:~$ bash
isen@localhost:~$ ps
   PID TTY          TIME CMD
  12996 pts/2    00:00:00 bash
  13406 pts/2    00:00:00 bash
  13435 pts/2    00:00:00 ps
isen@localhost:~$ echo $Var
CONTENU
```

Variable visibility 3/4

The same apply for your script, the scope of your variable will only be inside your script You may source another script to extend the vivibility of your variables to the other script

Consider two scripts Prog1.sh and Prog2.sh as bellow

```
isen@localhost:~$ cat Prog1.sh
#!/bin/bash
Var=CONTENU
echo "Prog1 : $Var"
./Prog2.sh
isen@localhost:~$ cat Prog2.sh
#!/bin/bash
echo "Prog2 : $Var"
isen@localhost:~$ ./Prog1.sh
```

```
Prog1 : CONTENU
Prog2 :
```

Variable visibility 4/4

Now ! Consider two scripts Prog1.sh and Prog2.sh as bellow

```
isen@localhost:~$ cat Prog1.sh
#!/bin/bash
Var=CONTENU
echo "Prog1 : $Var"
source ./Prog2.sh
isen@localhost:~$ cat Prog2.sh
#!/bin/bash
echo "Prog2 : $Var"
isen@localhost:~$ ./Prog1.sh
Prog1 : CONTENU
Prog2 : CONTENU
```

Protect a variable : Exemples

```
isen@localhost:~$ Var="ONE"
isen@localhost:~$ echo "$Var"_FILE
ONE_FILE
isen@localhost:~$ Var="ONE"
isen@localhost:~$ echo '$Var'_FILE
'$Var'_FILE
isen@localhost:~$ echo '${Var}'_FILE
${Var}_FILE
isen@localhost:~$ echo $Var_FILE
(nohing because Var_FILE dont exist)
isen@localhost:~$ echo ${Var}_FILE
ONE_FILE
isen@localhost:~$ls
C02 C03 C04 data EXAM Old ORIG
isen@localhost:~$ Var=$(ls) #or Var=`ls`
isen@localhost:~$ echo $Var
C02 C03 C04 data EXAM Old ORIG
```

Scripting base

What is a script

Instead of launching the commands directly in a terminal, we can write a text file with the shebang and the execution rights

```
username@hostname:~$ cat myfirstscript.sh
#!/bin/bash

echo toto
username@hostname:~$ chmod +x myfirstscript.sh
username@hostname:~$ ./myfirstscript.sh
toto
```

Advantages/Disadvantages

- **Advantages**
  - More readable
  - Saved
  - Exportable
  - Debugging
- **Disadvantages**
  - Debugging

Variable of a script

Name	Description
$0	the name of the current shell program.
$1...${n}	the n parameters passed to the program (to the shell) when it is called.
$#	the number of parameters passed to the shell program call (not included the $0 parameter)
$*	the list of parameters passed to the shell program call (not included the $0 parameter)

Name	Description
$$	the current process number (there is a unique number per process on the machine)
$?	the error code of the last command executed.

Example of use

```
username@hostname:~$ cat mysecondscript.sh
#!/bin/bash
echo "Thx to launch ${0}"
echo "There are ${#} arguments"
echo "They are : ${*} but the second is $2"
false
echo ${?}

username@hostname:~$ ./mysecondscript.sh toto titi tutu
Thx to launch ./mysecondscript.sh
There are 3 arguments
They are : toto titi tutu but the second is titi
1
```

Survival_Kit

Golden rules

- Indent your script
- Comment your script
- Use a Naming rule
- Declare your variable at the start of your script
- Always test your entries
- Give your script some “fresh air”
- Test the return value of your SHELL commands ($?)
- Use the man, level 1 (try a man -k)
- Render your script executable : **chmod +x Mynewscript.sh**

Golden rules example 1/2

```
#BAD
if [[ -f $titi ]];then echo "your parameter is a file";cp $1 "$1".old;
   fi
#GOOD
if [[ -f ${Nom_Fichier_Saisi} ]]
then
    echo "your parameter is a file"
    cp $1 "${Nom_Fichier_Saisi}".old
fi
```

Golden rules example 2/2

if your script is waiting for an argument representing a name of a file.

```
#Test of arguments
if [ $# -lt 1 ]
then
    echo "You must give an argument for the script"
    exit 1
fi
#Test of the type of the first argument
if [ -e $1 ]
then
    echo "You must give an valid file name for the first argument for
       the script"
    exit 2
fi
```

Algo

IF Condition

> IF condition

> SO

> ——> Launch_action

> END IF

Example of if condition

```
isen@localhost:~$ cat exampleIf.sh
#!/bin/bash
if [ $1 -eq 1 ]; then
        echo "The first argument is 1"
fi
isen@localhost:~$ bash exampleIf.sh 2

isen@localhost:~$ bash exampleIf.sh 1
The first argument is 1
```

if/else condition

> IF condition

> SO

> ——> Launch_action

> ELSE

> ——> Launch_action

> END IF

Example of if/else condition

```
isen@localhost:~$ cat exampleIfElse.sh
 #!/bin/bash
if [ $1 -eq 1 ]; then
        echo "The first argument is 1"
else
        echo "The first argument is not 1"
fi
isen@localhost:~$ exempleIfElse.sh 2
The first argument is not 1
isen@localhost:~$ exempleIfElse.sh 1
The first argument is 1
```

if/elif condition

> IF condition
>
> SO
>
> ——> Launch_action
>
> ELSE IF other_condition
>
> SO
>
> ——> Launch_action
>
> END IF

Example of if/elif condition

```
isen@localhost:~$ exampleIfelIf.sh
 #!/bin/bash
if [ $1 -eq 1 ]; then
        echo "The first argument is 1"
elif [ $1 -eq 2 ]; then
        echo "The first argument is 2"
fi
isen@localhost:~$ exampleIfelIf.sh 10
isen@localhost:~$ exampleIfelIf.sh 1
The first argument is 1
isen@localhost:~$ exampleIfelIf.sh 2
The first argument is 2
```

if/elif/else condition

> IF condition
>
> SO
>
> ——> Launch_action

> ELSE IF other_condition

> SO

> ——> Launch_action

> ELSE

> ——> Launch_action

> END IF

Exemple of condition if/elif/else

```
isen@localhost:~$ cat exampleIfelIfElse.sh
 #!/bin/bash
if [ $1 -eq 1 ]; then
        echo "The first argument is 1"
elif [ $1 -eq 2 ]; then
        echo "The first argument is 2"
else
        echo "I do not understant"
fi
isen@localhost:~$ bash exampleIfelIfElse.sh 10
I do not understant
isen@localhost:~$ bash exampleIfelIfElse.sh 1
The first argument is 1
isen@localhost:~$ bash xampleIfelIfElse.sh 2
The first argument is 2
```

Tests - File

Operand	Description	example
-e filename	true if filename exist	[-e /etc/shadow]
-d filename	true if filename is a directory	[-d /tmp/trash]
-f filename	true if filename is an ordinary file	[-f /tmp/Log.txt]
-L filename	true if filename is a symbolic link	[-L /home]

Operand	Description	example
-r filename	true if filename is readable (r)	[-r /boot/vmlinuz]
-w filename	true if filename is modifiable (w)	[-w /var/log]
-x filename	true if filename is an executable (x)	[-x /sbin/halt]

Tests - Strings

Operand	Description	example
-z txt	true if the string is empty	`[ -z "${VAR}"]`
-n txt	true if the string is NOT empty	`[ -n "${VAR}"]`
txt **=** txt	true if the two string are equal	`[ "${VAR}"= "toto"]`
txt **!=** txt	true if the two string are NOT equal	`[ "${VAR}"!= "toto"]`

Tests - Numeric

Operand	Description	example
num1 **-eq** num2	equality	[$Number -eq 42]
num1 **-ne** num2	not equal	[$Number -ne 42]
num1 **-lt** num2	lesser than (<)	[$Number -lt 42]
num1 **-le** num2	lesser or equal (<=)	[$Number -le 42]
num1 **-gt** num2	greater than (>)	[$Number -gt 42]
num1 **-ge** num2	greater or equal (>=)	[$Number -ge 42]

Example of test (1/2)

```
1 #!/bin/bash
2 # directory exists ? 1/2
3 test -d /home/isen
4 rc=$?
```

```
5 if [ $rc -ne 0 ]; then
6     echo "The directory /home/isen does not exist"
7 fi
```

Example de test (2/2)

```
1 #!/bin/bash
2 # directory exists ? 2/2
3 if [ -d "/home/isen" ]; then
4         echo "the directory /home/isen exists"
5 fi
6 # comparison of 2 strings
7 if [ "toto" = "titi" ]; then
8         echo "toto is not equal to titi"
9 fi
```

While loop

> WHILE condition

> DO

> ——> Launch_action

> RESTART

Example of while loop (1/2)

```
1  isen@localhost:~$ cat while.sh
2  #!/bin/bash
3  a=0
4  while [ $a -le 3 ]
5  do
6      echo "$a"
7      a=$(( $a + 1 ))
8  done
9
10 isen@localhost:~$ bash while.sh
11 0
12 1
13 2
14 3
```

Example of while loop (2/2)

```
while true; do
    echo $RANDOM
done
```

The bash is compiled as a 64-bit monothread. With this command your bash will use 100% of a CPU core. To protect your CPU, always put an “useless/time-out” action

```
while true; do
    echo $RANDOM
    sleep 1
done
```

for loop

> FOR variable IN value1 value2 value3

> DO

> ——> Launch_action

> NEXT_ACTION

Example of for loop (1/2)

```
isen@localhost:~$ cat for1.sh
#!/bin/bash
for var in 'value1' 'value2' 'value3'; do
    echo "Var =  ${var}" ;
done

isen@localhost:~$ bash for1.sh
Var = value1
Var = value2
Var = value3
```

Example of for loop (2/2)

To get closer to the c code (this syntax is not widely used in bash):

```
1
2  isen@localhost:~$ cat for2.sh
3  #!/bin/bash
4  for i in $(seq 0 2)
5  do
6      echo $i
7  done
8
9  isen@localhost:~$ bash for2.sh
10 0
11 1
12 2
```

This syntax **$(seq 0 3)** is equivalent to **((i=0;i<=3;i++))**

Case/Esac

```
1  case ${vars} in
2      1)  command1
3          command1bis
4          ;;
5      2)  command2
6          command2bis
7          ;;
8      *)  commanddefault
9          commanddefault2
10         ;;
11 esac
```

Example of Case/Esac

```
1  isen@localhost:~$ cat myScriptCase.sh
2  #!/bin/bash
3  case ${1} in
4      toto) echo "toto is a beautifull name";;
5      titi) echo "I prefer toto as a name";;
6      *) echo "i do not understand"
7  esac
8
9  isen@localhost:~$ bash myScriptCase.sh toto
10 toto is a beautifull name
11 isen@localhost:~$ bash myScriptCase.sh titi
12 I prefer toto as a name
13 isen@localhost:~$ bash myScriptCase.sh Loic
14 i do not understand
```

BREAK/CONTINUE

```
isen@localhost:~$ cat for3.sh
#!/bin/bash
for var in value1 value2 value3 value4 value5; do
    [ "$var" = "value2" ] && continue
    [ "$var" = "value4" ] && break
    echo $var
done

isen@localhost:~$ bash for3.sh
value1
value3
```

BREAK = stop the loop

CONTINUE = go to the next iterration

Process management

Linux being a multitasking system, several programs can run at the same time.

When a program is started, a process is created. This is an active entity that has characteristics (priority, registers, ordinal counter, memory, etc.). Some characteristics may change over time

The system identifies the processes using an identifier (PID = **P**rocess **ID**entification).

The management of processes in Linux is said to be hierarchical.

A process can itself create another process (fork + exec). The created process is called a child process. The creator is called the parent process.

nice & renice

The nice and renice commands allow you to set or change the priority of a process. The range of possible values is -20 (most favorable priority) to 19 (least favorable).

```
isen@localhost:~$ nice -n -20 find / -type f -name "*.sh"
isen@localhost:~$ renice 20 7643
```

kill

The kill command sends a signal to a process. Overlays to the kill command exist killall, pgrep / pkill, xkill

```
isen@localhost:~$ kill 456
isen@localhost:~$ kill -9 -1
isen@localhost:~$ pkill firefox
```

Managing tasks in an interactive session

Interactive processes are started and managed from the user's terminal. There are 2 modes:

- Foreground mode
- Background mode

Managing tasks in an interactive session - Foreground mode

The process monopolizes the terminal until its termination

```
isen@localhost:~$ sleep 10
[...]
```


Managing tasks in an interactive session - Mode background

The process works in parallel with the terminal

```
isen@localhost:~$ sleep 10 &
[1] 3384
$
```

The "ctrl-z" key sequence and the commands "jobs, bg, fg commands" allow you to switch a process from one mode to the other.

Synthesis

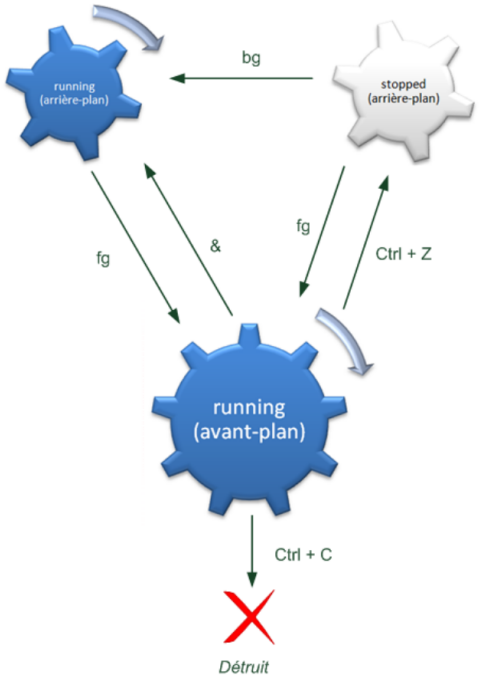

Display the processes

You can use the SHELL command ps to display all the processes currently in execution on your computer

example to see the processes belonging to your **current SHELL** :

```
isen@localhost:~$ ps
   3837 pts/2    00:00:00 bash
 137967 pts/2    00:00:09 evince
 144605 pts/2    00:00:00 ps
```

example to see the processes belonging to you **current owner** :

```
isen@localhost:~$ ps -u isen
   PID TTY          TIME CMD
   2053 ?        00:00:02 systemd
   2054 ?        00:00:00 (sd-pam)
   2059 ?        00:04:16 pulseaudio
....
```